

Tutorials

All the tutorials traditionally found on our website, pertaining to the Starter CQB Gunstock in alphabetical order

- [Starter Shoulder Extension Upgrade EN FR](#)
- [Starter Switch Swide Instructions EN FR](#)
- [YouTube Videos](#)
- [Starter Shoulder Extension Upgrade EN Test](#)
- [Starter Switch Side instructions EN Test](#)

Starter Shoulder Extension

Upgrade EN FR



PROTUBEVR

STARTER UPGRADE :

SHOULDER EXTENSION

Hello, fellow gamer!

If you are reading this, you are willing to enhance your Pro/Mag-Starter and increase your comfort while playing. And we will help you to do it!

The Cross-Starter allows you to aim in-game even more precisely than the Mag-Starter.

We invite you to join our **Discord** community for any question or directly contact us through our **support service** on **our website**.



Upgrading to the Cross-Starter should take you 5 minutes. For video setup,

you can check our YouTube Playlists.

First, make sure you work in a clear area and be very careful. Some parts can get lost easily.

Page 2

Bonjour, camarade joueur !

Si tu lis ceci, c'est que tu es prêt à améliorer ton Pro/Mag-Starter et à augmenter ton confort de jeu. Et nous t'aiderons à le faire !

Le Cross-Starter te permet de viser en jeu avec encore plus de précision que le Starter.

Nous t'invitons à rejoindre notre communauté **Discord** pour toute question ou à nous contacter directement via notre **service d'assistance** sur notre **site web**.






L'amélioration vers le Cross-Starter devrait te prendre 5 minutes. Pour la mise en place en vidéo,

tu peux consulter nos Playlists sur YouTube.

Tout d'abord, assure toi de travailler sur une zone dégagée et sois très prudent. Certaines pièces peuvent se perdre facilement.

Page 3



Feel the game

		
Insert the Mag-Starter's tube in the Cross-Starter upgrade's connector.	You can now see the shape of the Cross-Starter.	Tighten the screw on the connector (not too strong, you do not want to break the part). <i>(The arrow on the picture is for the last step)</i>






Slightly tighten the screw that attaches the two connectors. You will need to adjust it later, depending on your playing style.

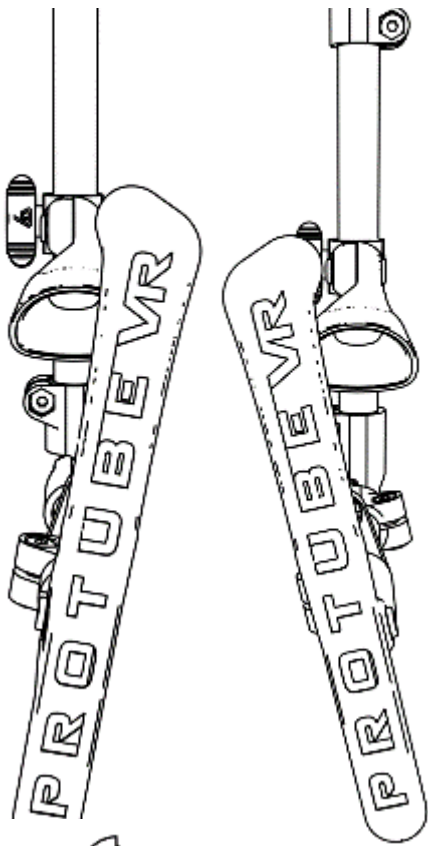If you chose the sling option, you just need to attach it to the rubber ring next to the stock.



Fold the Cross-Starter to a 90° angle.	Adjust the tube with the top of the stock and tighten the screw (arrowed in 3 rd picture).
--	---



Version française

		
Insère le tube du Starter dans le raccord de la partie avec la crosse.	Tu peux déjà voir la forme du Cross-Starter.	Serre suffisamment la vis sur le raccord pour que le tube ne bouge plus (pas trop fort, tu ne voudrais pas casser la pièce). <i>(La flèche est pour la dernière étape).</i>



Visse légèrement la vis qui attache les deux raccords. Tu auras besoin de l'ajuster plus tard suivant ton style de jeu.

Si tu as pris l'option avec la sangle, il te suffit de la clipser à l'anneau en caoutchouc proche de la crosse.

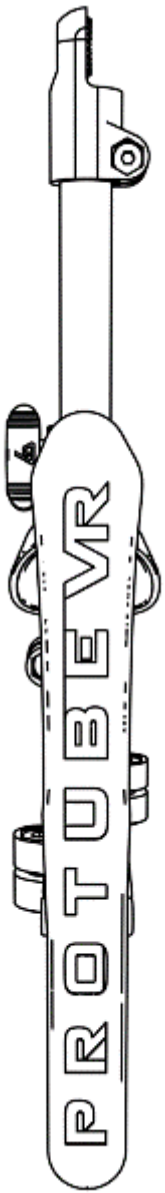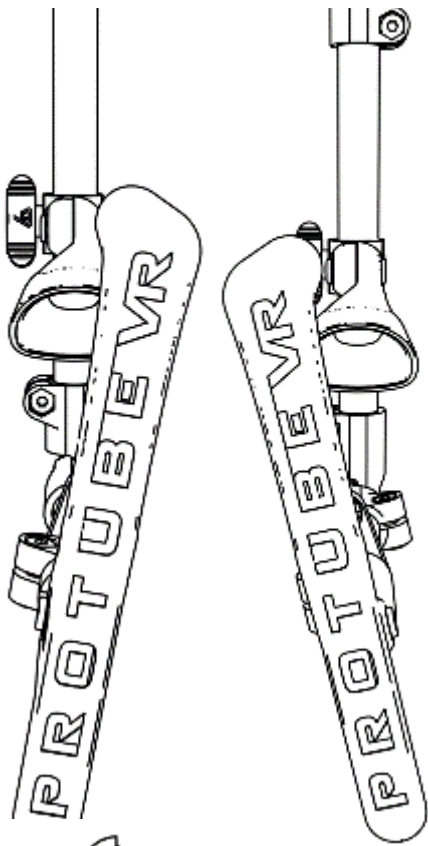

Plie le Cross-Starter à 90°.

Ajuste le tube avec le haut de la crosse et serre plus la vis si besoin (fléchée sur la troisième photo).

Starter Switch Swide

Instructions EN FR



PROTUBEVR

STARTER

Hello, fellow gamer!

If you are reading this, you want to switch the laterality of your Starter CQB. And we will help you do it!

We invite you to join our **Discord** community for any question or directly contact us through our **support service** on **our website**.



This process should take 10 minutes.

For video setup,

you can check our YouTube Playlists.

This tutorial shows right-handed to left-handed.

Left-handed to right-handed use the same steps, you will just need to follow them in mirror.

First, make sure you work in a clear area and be very careful. Some parts can get lost easily.

Salutations, ami gamer !

Si tu es en train de lire ceci, c'est que tu veux changer la latéralité de ton Starter CQB. Et nous allons t'y aider !

Nous t'invitons à rejoindre notre communauté **Discord** pour toute question ou à nous contacter directement via notre **service d'assistance** sur notre **site web**.



Ce procédé devrait te prendre 10 minutes.

Pour des instructions vidéo,

tu peux regarder notre playlists YouTube.

Ce tutoriel montre droitier vers gaucher.

Pour passer de gaucher à droitier, les étapes sont les mêmes. Il faudra simplement les suivre en miroir.

Avant tout, assure-toi de travailler dans une zone dégagée et sois très prudent, certaines pièces peuvent se perdre facilement.

English version: p2

Version française : p4

ENGLISH VERSION

STEP 1: FASTENED TO MAGNETIC CUP



Remove the fastened cup using the bigger Allen key, and detach the magnetic cup.
Keep all parts, you will need them to assemble the cup back.

Exchange the position of both connections.
The butterfly screws must be on the same side.



Unscrew the black support on the fastened cup using the medium Allen key.
Take care not to lose the square nut on the back of the cup.

Remove the magnet from the cup using the smaller Allen key, and screw it to the other cup.
Take care not to lose the square nut on the back of the cup.



You now have your magnetic cup for the other hand.


STEP 2: MAGNETIC TO FASTENED CUP



You removed the magnet on the previous step. Screw the black support back on the cup that has no magnet.
Take care not to lose the square nut on the back of the cup.

Put the screw with the O-ring back on the black support.

Place the notched washer on the screw.

		
Put them in the T-connection.	Place the second O-ring in the whole, around the screw.	Place the hex nut. Screw them all together.



Now you can attach the magnetic cup to the back.
And there you have your left-handed Starter CQB.

VERSION FRANÇAISE

Étape 1 : de la coupelle fixe à magnétique



Retire la coupelle fixe en utilisant la plus grosse clé Allen.
Et détache la coupelle magnétique.
Garde bien toutes les pièces, tu en auras besoin pour réassembler le tout une fois fini.



Échange les positions des deux raccords.
Les vis papillons doivent être du même côté.



Enlève le support noir de la coupelle fixe en utilisant la clé Allen moyenne.
Attention à l'écrou carré à l'arrière de la coupelle, ne le perds pas.



Enlève l'aimant de la coupelle magnétique en utilisant la plus petite clé Allen, et transfère-le sur l'autre coupelle pour la rendre magnétique.
Attention à l'écrou carré à l'arrière de la coupelle, ne le perds pas.



Tu as transformé la coupelle fixe en magnétique.

Étape 2 : De la coupelle magnétique à fixe



Tu as enlevé l'aimant de la coupelle dans l'étape précédente. Visse le support noir à la coupelle qui n'a pas d'aimant.
Attention à l'écrou carré à l'arrière de la coupelle, ne le perds pas.

Remets la vis avec le joint torique dans le trou du support noir.

Place la rondelle crantée sur la vis.



Place le tout dans le raccord en T.

Place le second joint torique dans le trou, sur la vis.

Place l'écrou hexagonal.
Vis le tout avec la plus grosse clé Allen, et le tour est joué.



Tu peux maintenant attacher la coupelle magnétique.
Et voilà, tu as maintenant un Starter CQB pour gaucher.

YouTube Videos

https://www.youtube.com/embed/v-OPal_L_9o?si=gUCG3IKzK0kyAV3R

<https://www.youtube.com/embed/JqMz-i5TAP4?si=jWOQLiegIsW7OXsO>

https://www.youtube.com/embed/R7SYyDTQNfs?si=c2whzj_BbJHr9P6-

https://www.youtube.com/embed/yX5ITCMh_3Y?si=DB4Xc4cegNq47uCY

Starter Shoulder Extension Upgrade EN Test

The Cross-Starter allows you to enhance your Pro/Mag-Starter and increase your comfort while playing, and improve your in-game aim even more precisely than the classic Starter CQB.

🕒 Upgrading to the Cross-Starter should take you 5 minutes.

For video setup, [you can check our YouTube tutorial Playlists.](#)

Make sure you work in a clear area and be very careful, some parts can be easily lost.




Insert the Starter's tube in the stock upgrade's connector.

Tighten the screw on the connector (not too strong, you do not want to break it).



Loosen the stock's screw and position it in a square (90°) angle with the tube.

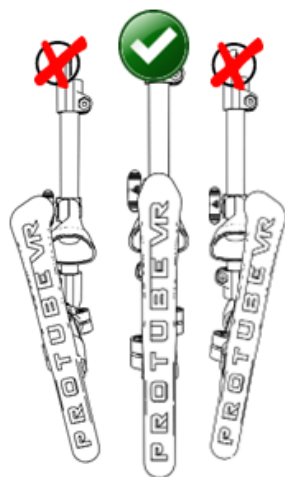

Adjust the tube with the top of the stock and tighten the screw (arrowed in 3rd picture).



You can adjust the rear tube and stock to fit your gameplay, and attach the sling.
We recommend having the cheek rest parallel to the Starter's tube, but it's up to you
Enjoy!

Starter Switch Side instructions EN Test

Here is how to switch the laterality of your Starter CQB.

🕒 This process should take 10 minutes.

For video setup, [you can check our YouTube tutorial Playlists](#).

This tutorial shows right-handed to left-handed. Left-handed to right-handed use the same steps, you will just need to follow them in mirror.

Make sure you work in a clear area and be very careful. Some parts can easily be lost.

STEP 1: FASTENED TO MAGNETIC CUP



Remove the fastened cup using the bigger Allen key, and detach the magnetic cup.

Keep all parts, you will need them to assemble the cup back.



Exchange the position of both connections.

The butterfly screws must be on the same side.



Unscrew the black support on the fastened cup using the medium Allen key.

Be careful not to lose the square nut on the back of the cup.



Remove the magnet from the cup using the smaller Allen key, and screw it to the other cup.
Be careful not to lose the square nut here too.



You now have your magnetic cup for the other hand.

STEP 2: MAGNETIC TO FASTENED CUP



You removed the magnet on the previous step. Screw the black support back on the cup that has no magnet.
Take care not to lose the square nut.



Put the screw with the O-ring back on the black support.



Place the notched washer on the screw.



Slot them in the T-connection.

Place the second O-ring in the hole,
around the screw.

Place the hex nut. Screw them all
together.



Now you can attach the magnetic cup back.

And there you have your left-handed Starter CQB.